


Specification FX3000SS-D Oil/ Water Separator

SPECIFICATIONS


Material - Tank 1.6mm 304 stainless steel
 Lid 1.2mm 304 stainless steel
 Stand 25mm SHS stainless steel

Maximum flow rate 3000 litres per hour
 Actual flow rate 2580 litres per hour
 Pump type ASM DS32
 Separation process Enhanced gravity
 Coalescing medium Vertical tube pack
 Weight (empty) 80 Kg
 Weight (full) 430 Kg
 Volume 350 litres net
 Polishing filter 2x100 micron bag
 Inlet 40mm BSP Female
 Outlet 50mm BSP Female
 Gate Valve 2x40mm BSP Male

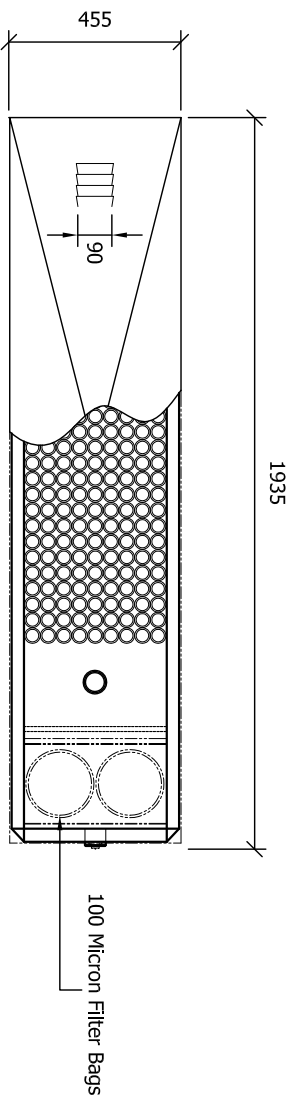

Note:
 For marine applications Separator can be supplied in 316 or 445m Grade Stainless Steel.

VTC Filter pack Specification
 Tube 42 mm Dia.
 Block Size x 2 294x630x350mm
 Volume 0.17 m³
 Surface Area 42 m²

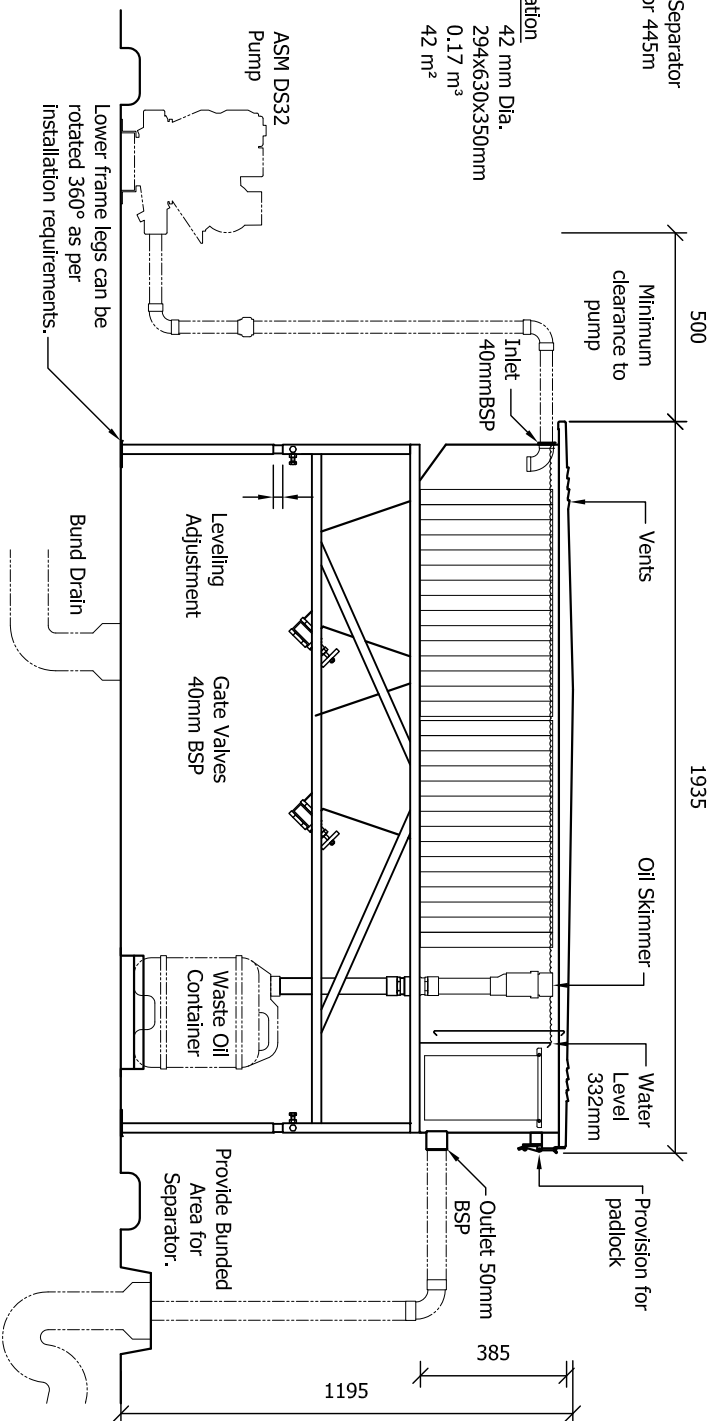

This is a schematic representation only. Slab size and gradient to engineers details as arranged by customer. All plumbing and electrical connections to be installed by certified tradesmen in accordance with relative authorities requirements. Tradesmen to be engaged by the purchaser. System to be approved by relative Local Authorities before Installation.
 This Drawing and design is the Property of Fox Environmental Systems Pty Ltd. It must not be used for any other purpose than that for which it was issued.

Project	
Fox FX3000SS-D Specification	
Drawing Title	
FX3000SS-D Oil/ Water Separator	
Drawn by:	JFS
Date:	01/11/2010
Scale:	1:20
Drawing No:	A4-SPEC-1022